



A Bibliometric Review Approach to the Ultrasonic Pulse Velocity and Compressive Strength

Hicham Lotfi ^{a,b*}

^a *Laboratory of Metrology and Information Processing, Ibn Zohr University, Agadir, Morocco.*

^b *Laâyoune Higher School of Technology, Ibn Zohr University, Morocco.*

Author's contribution

The sole author designed, analysed, interpreted and prepared the manuscript.

Article Information

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/96427>

Review Article

Received: 11/12/2022

Accepted: 13/02/2023

Published: 13/07/2023

ABSTRACT

Bibliometric analysis is an interesting statistical tool for studying the state of the art in any field of scientific knowledge and identifying the information needed for various purposes. Therefore, in this paper we uncover the synthesis between Ultrasonic Pulse Velocity (UPV) and Compressive Strength (CS) parameters, also to classify research trends knowledge gaps that can be treated in future research on UPV-CS. The maps of publication are made by a Bibliometric analyzes in order to determine the use of these techniques for the control of cementitious structures in the research subjects of the two topics separately and jointly on the basis of the identified academic publications from Scopus (i.e. 3018 CS Articles, 126 UPV Articles and 82 UPV-CS Articles). This comparison of two parameters that describe the durability of materials used in literature reviews allows the authors to focus on identifying the most influential contributors to research advances in Civil Engineering field.

Keywords: *Ultrasonic pulse velocity (UPV); compressive strength (CS); literature review; bibliometric review.*

*Corresponding author: Email: lotfi.hicham@yahoo.fr;

1. INTRODUCTION

“Nondestructive testing techniques, particularly the UPV and rebound hammer, are performed to evaluate the quality of a concrete structure across the world because they enable the examination of structures without damaging them. UPV can assess the homogeneity of concrete and properties that change with time” [1]. “New developments include air-coupled and laser-generated measurement equipment used as an ultrasonic technique for evaluation of reinforced concrete structures, [2] describe an automated device utilizing air coupled transducers”. “It generates Rayleigh waves on a single concrete surface and measures the dispersive propagation velocity and attenuation, which can then be correlated to concrete properties. The ultrasonic pulse velocity (UPV) measurement can be utilized for the determination of concrete uniformity, cracks or voids' presence, changes in properties with time. As the amount of DOTP in the concrete increases, the ultrasonic pulse velocity of the concrete decreases. It can be said that this is due to the porous structure of DOTP-reinforced concrete” [3]. “The dramatic drop in ultrasonic pulse velocity and the porous structure of DOTP-reinforced concrete is another indication that DOTP-reinforced concrete has good quality” [3]. “When UPV of cementations structures is higher, the structures are classified as good and high-quality concrete grade” [4]. “Concrete Compressive Strength by Means of Ultrasonic Pulse Velocity and Modul of Elasticity” [5]. [6] Revealed that “the use of carbon nanostructures of slag and cement improves the durability of concrete pavements”. “Effect of silica fume on mechanical properties of high-strength concrete” [7]. This article is ordered as follows. In Part 2, previous work related to CS and UPV topics is summarized. In Section 3, mixed-review methodology used in this research is illustrated in detail. Subsequently, the results obtained and the conclusions are described in section 4.

2. PREVIOUS WORK

This section discusses existing literature review on CS and UPV to clarify the need of the mixed review on UPV for CS presented in this paper.

2.1 CS-Related Review

In 1992 [8] showed the first work of including metakaolin in concrete which shows very significant improvements in strength. The results

of their work indicated that the optimal level of metakaolin replacement is between 5 and 10%. The use of adjuvants and metakaolin in high strength concrete has been studied by other researchers [9-11] obtained compressive and 28-day strengths of the order of 106 N/mm² for concrete containing metakaolin (10%) and with a superplasticizer [8] and [10] obtained conclusions on the compressive strength in particular on the effect of: Methodology of the test mixture, approach of the mix design, variations of the composition of the cement [12]. Have examined the compressive strength of the mortar by adding Silica Fume in the paste, the results obtained show that the porosity of the mortar decreased in the presence of silica, while the porosity increased in the case of the paste due to the reaction of SF with alkalis. Thus, the fine particles of Silica Fume penetrate into the pores and increase the compactness.

2.2 UPV-Related Review

Ultrasonic pulse velocity test is a non-destructive testing technique and very sensitive technique. It can be used to approximately evaluate the internal structural of a material. The main factors influencing UPV results can be concluded as sizes of aggregate, ages of concrete, test temperatures, moisture content of specimens, types of cement, shapes and sizes of specimens, and curing conditions. For this, it used to interpret the homogeneity, quality, cracks, voids, and anomalies of concrete. UPV used also to evaluate Self-healing concrete, it observed that a 1% greater water content of concrete specimens increases UPV results by 160 m/s. The results of UPV will increase by 34 m/s on average when temperature increases by 10°C [13]. For the study of the performance of concrete with PVC fibers, [14] Estimated the quality of concrete made with PVC fibers using the UPV controller [14]. Observed that the UPV of the specimens decreased with increasing PVC fiber content. This decrease is not considered to be due to porosity or internal defects in the concrete. In fact, the plastic has the ability to pick up pulse waves, which may be the main cause of the decrease in UPV values of concrete [15]. When the UPV values are between 3500 and 4500m/s, the concrete is termed as good concrete and when the values are more than 4500 m/s, the concrete is considered as the superior one. The maximum and minimum UPV values of PVC fiber concrete are between 4350 and 4640 m/s. UPV is also a means to study the behavior of self-compacting high volume fly ash (HVFA) based

on high volume fly ash. This test also offers the idea of the different defaults present inside the concretes by electron wave transfer [16]. In general, the UPV values decrease with increasing proportion of FA in SCC mixtures. However, with the increase in the release times, the UPV values were found to be increased in the same way as the compressive strength [17]. Table 1 tabulates existing reviews with respect to UPV and CS.

3. RESEARCH METHODOLOGY

The objective of this research is to synthesize the domain knowledge and to identify the research needs and future research direction within the field of UPV-CS in the investigation of cementitious materials for construction. Toward this objective, a “mixed-review method” is employed in this study. In general, this method consists of quantitative review (i.e., Bibliometric

approach) and qualitative review (i.e., systematic approach), so that it is capable of eliminating biased conclusion and subjective interpretation while providing an in-depth understanding of domain knowledge and research trends [26]. The proposed mixed examination method used in this paper is conducted in three phases (Fig. 1). Phase 1 involves a bibliometric analysis of the UPV literature and the CS literature. The aim of this step is to discover the knowledge domains of these two topics (UPV and CS respectively). The results of these two topics are summarized in this phase. The second phase consists of a bibliometric analysis of UPV for CSO. Based on the knowledge areas identified for UPV and CS individually, this phase identifies the joint research priorities of UPV and CS (i.e., UPV for CS). Phase 3 is a systematic review of research on UPV applications in the CS. In this step, academic articles on UPV for CS are grouped by research topic in a systematic way.

Table 1. Summary of literature review on CS, UPV

Review article	Research method	Research theme	
		CS	UPV
[18]	Systematic review	x	
[19]	Systematic review	x	
[20]	Critical review	x	
[21]	Critical review	x	
[22]	Critical review	x	
[23]	Critical review	x	
[24]	Bibliometric analysis	x	
[25]	Systematic review		x

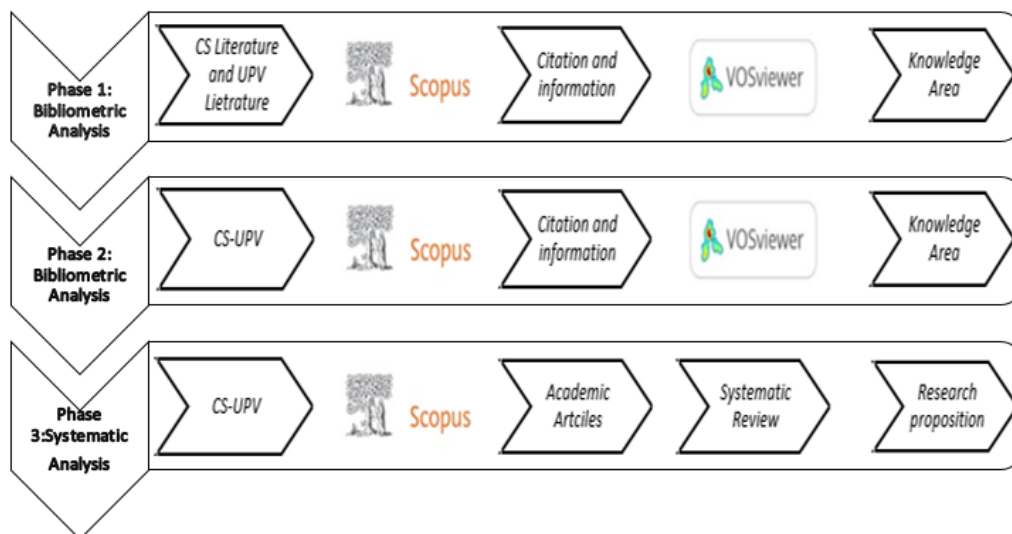


Fig. 1. Overview of methodology research

4. RESULTS AND FINDINGS

4.1 Overview

The keyword search strategies listed in Table 2 were employed to identify relevant academic articles and their journals and conferences, which have been partially summarized in Table 3. Particularly, the number of resulting UPV publications for construction is quite low due to the use of UPV to investigate the durability of cementitious materials as keyword to search the academic database. As shown in Table 2, the majority of academic publications on CS and UPV are found in the top journals in the field, Construction and Building Materials, Cement and Concrete Composites, Materials, Journal of Building Engineering. Among these journals, Construction and Building Materials is the journal that includes the most publications on these three area (CS, UPV and UPV-CS).

Fig. 2 shows how the number of publications on the three topics under review (CS, UPV and UPV-CS) varies each year. Publications on SC showed an overall upward trend since 2000, while the curve for UPV publications showed a rapid increase since 2003. The number of publications on UPV-CS is relatively small, compared with the number of publications on both CS and UPV, of which there were 21 in 2021. The trend shows a growth state, indicating an increasing attention to the application of UPV to control the strength of construction materials. The rationale for using UPV to determine the strength of materials research occurred in 2016, when the number of publications exceeded 10 for

the first time. This trend has continued from 2020.

4.2 Bibliometric Analysis of UPV-CS

Interestingly, less attention has been directed toward UPV-CS. Only 82 results were obtained for this research topic from the Scopus database, which is relatively fewer in comparison with CS (3018). In this section, 82 publications related to this topic were analyzed using a Bibliometric approach, with the intention of exploring the current research patterns in UPV-CS. The keywords of 82 academic publications on UPV-CS were fed into VOSviewer to generate a co-occurrence graph of author keywords. The minimum number of time that a keyword must occur to be included was set to 3. Of the 277 keywords, 22 met the threshold. The cluster view of author keywords in the VOSviewer is shown in Fig. 3; the bigger the circle indicates the more times the item occurs in the literature [27]. The detailed quantity information for each of the keywords of UPV-CS literature is tabulated in Table 4. As shown in Fig. 3 and Table 4, other than the keywords UPV-CS, the occurrence of keywords is evenly distributed. Most of the publications pertaining to UPV-CS have been published in the period after 2015, indicating regency compared to studies exploring either of the two topics (CS and UPV) separately. Keywords such as Strength, Flexural strength, Portland limestone cement, Cement and Geopolymer form the biggest cluster in Fig. 3, which indicates that material Strength is a major topic in research on UPV-CS

Table 2. Literature search strategies and their results

Topic	Search keywords	Time period	Number of results
Compressive Strength	"Compressive strength" AND "Concrete" AND "Cement" AND "Mortar"	Jan, 2000- Dec, 2021	3057
Ultrasonic pulse velocity	"ultrasonic pulse velocity" AND "Concrete" AND "Cement" AND "Mortar"	Jan, 2000- Dec, 2021	126
Compressive Strength and Ultrasonic pulse velocity	"Compressive strength" AND "ultrasonic pulse velocity" AND "Concrete" AND "Cement" AND "Mortar"	Jan, 2000- Dec, 2021	82
Compressive Strength and Ultrasonic pulse velocity	Manual screening based on the 113 studies in Stage 2	Jan, 2000- Dec, 2021	

Table 3. Identified academic journals and number of articles from Jan, 2000 to Dec, 2021

Journal/conference title	Number of articles		
	Compressive Strength (CS)	Ultrasonic pulse velocity (UPS)	CS and UPV
Advanced Materials Research	58	0	1
Aip Conference Proceedings	29	2	2
American Concrete Institute ACI Special Publication	61	2	2
Applied Sciences Switzerland	21	1	1
Case Studies In Construction Materials	16	1	1
Cement And Concrete Composites	66	6	1
Cement And Concrete Research	73	2	0
Construction And Building Materials	397	20	18
Data In Brief	4	1	1
European Journal Of Environmental And Civil Engineering	12	3	2
Iop Conference Series Earth And Environmental Science	32	1	3
Iop Conference Series Materials Science And Engineering	73	5	0
Journal Of Building Engineering	36	2	2
JurnalTeknologi	7	4	4
Key Engineering Materials	41	4	3
Materials	86	7	6
Materials And Structures Materiaux Et Constructions	26	3	3
Structural Concrete	16	2	2
Sustainable Construction Materials And Technologies	11	1	1

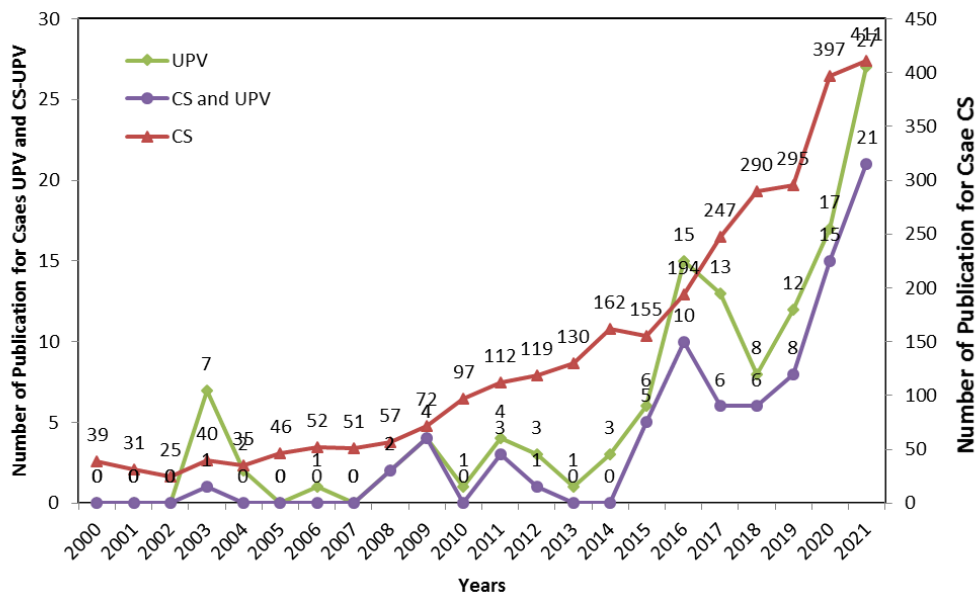


Fig. 2. Yearly literature distribution for the published papers targeted on CS, UPV and UPV-CS (Jan 2000 to Dec 2021)

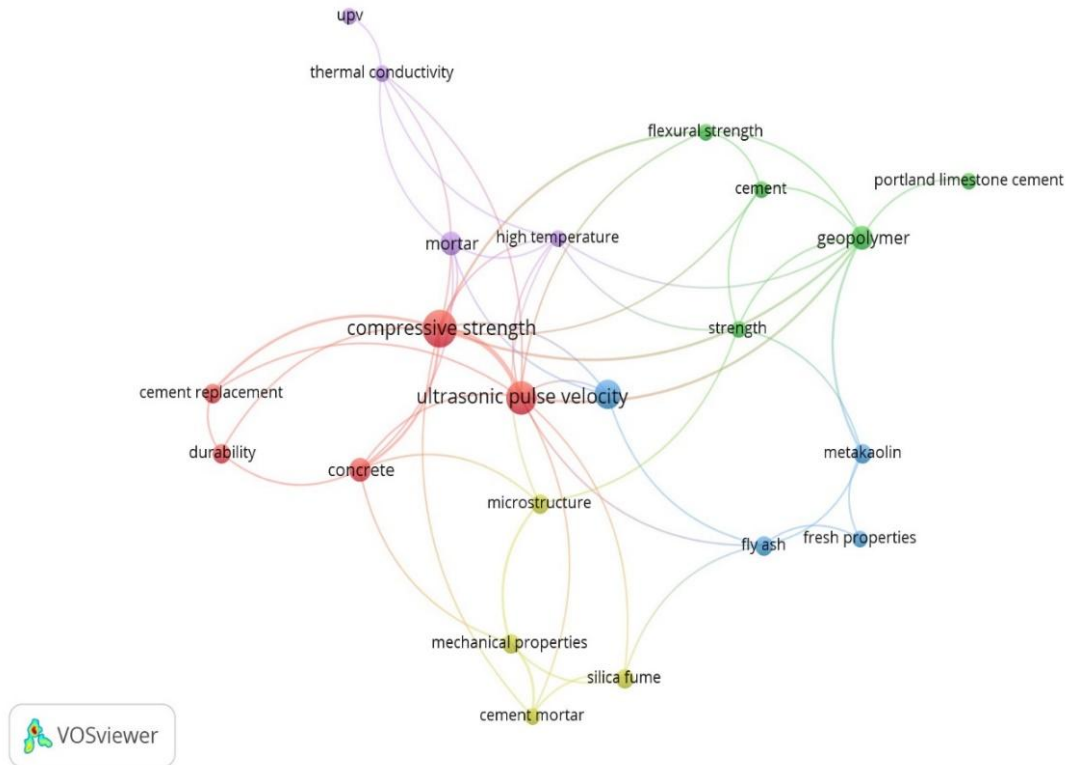


Fig. 3. Author keywords co-occurrence UPV-CS

Table 4. Top keywords for UPV-CS literature

Keyword	Number	Occurrences	Total link strength
Compressive strength	62	15	22
Ultrasonic pulse velocity	42	12	18
Self-healing	9	9	4
Concrete	26	6	7
Geopolymer	2	6	11
Mortar	47	6	5
Cement replacement	4	4	4
Durability	11	4	3
Fly ash	10	4	5
Mechanical properties	10	4	6
Metakaolin	7	4	5
Microstructure	7	4	5
Silica fume	7	4	4
Cement	26	3	4
Cement mortar	4	3	5
Flexural strength	3	3	5
Fresh properties	3	3	2
High temperature	3	3	7
Portland limestone cement	3	3	1
Strength	3	3	5
Thermal conductivity	3	3	5
UPV	3	3	1

Citation information for the 82 documents was analyzed to reveal the significant publications in the field of UPV-CS. The citation analysis results are shown in Table 5. The 10 most-cited papers and the number of time search article was cited is listed in Table 5. The citation analysis was conducted to identify the research distribution across the world. VOSviewer provides a function to categorize the documents and their citations based on the country of publication, which can be seen in Fig. 4. The minimum number of

documents from each country was set at 3; therefore, 3 countries met the threshold out of 32 possible countries). It is obvious that Malaysia and Turkey contributes the most in terms of UPV-CS, however, the citation number of Malaysia is relatively low. India has the third most studies concentrating on this specific topic. On the contrary Poland, United States and Canada are very prominent in the number of citations.

Table 5. Most-cited academic publications regarding for UPV-CS

N°	Document	Title	Cited times
1	[28]	Effect of rice husk ash on the strength and durability characteristics of concrete	202
2	[29]	Concrete using agro-waste as fine aggregate for sustainable built environment – A review	95
3	[30]	An investigation on effect of partial replacement of cement by waste marble slurry	87
4	[31]	Properties of self-compacting mortars with binary and ternary cementitious blends of fly ash and metakaolin	77
5	[32]	Freeze-thaw resistance of blended cements containing calcined paper sludge	71
6	[33]	Thaumasite form of sulfate attack in limestone cement mortars: A study on long term efficiency of mineral admixtures	53
7	[34]	The use of high calcium wood ash in the preparation of Ground Granulated Blast Furnace Slag and Pulverized Fly Ash geopolymers: A complete microstructural and mechanical characterization	51
8	[35]	Mathematical model for the prediction of cement compressive strength at the ages of 7 and 28 days within 24 hours	46
9	[36]	Long term behavior of Portland limestone cement mortars exposed to magnesium sulfate attack	42
10	[31]	Effects of marble powder and slag on the properties of self compacting mortars	38

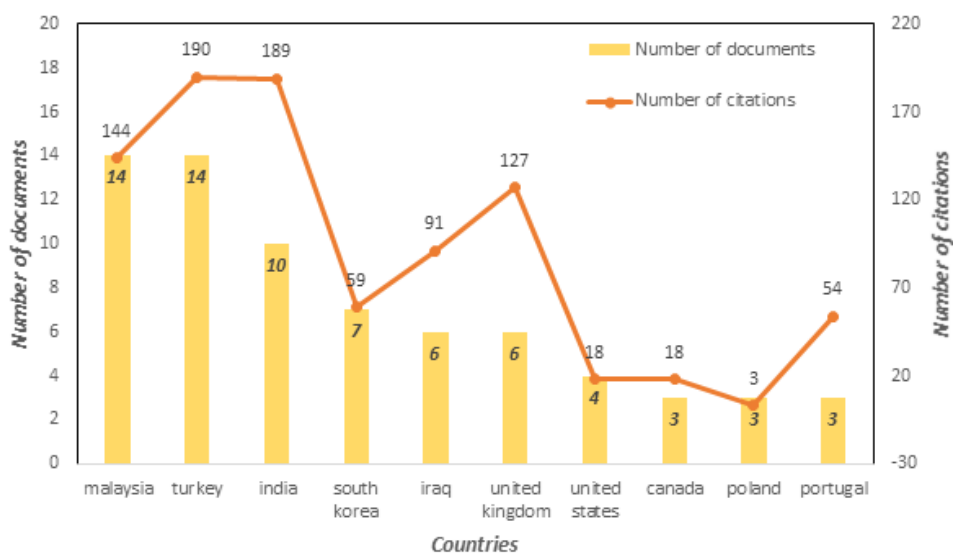


Fig. 4. Documents and citation country/region distribution

5. CONCLUSION

This paper attempts to present the studies on the use of CS compressive strength of materials and UPV ultrasonic pulse velocity used in civil engineering. A mixed review was conducted to develop the scientific maps of CS, UPV and UPV-CS. In this review, a quantitative review is conducted using VOSviewer on the topic of CS for UPV from the literature retrieved from Scopus.

This search has some limitations. Namely, the data are extracted from a single database due to the consistent requirements developed by VOS Viewer. For future perspectives, more complete data can be obtained for quantitative and qualitative analyses by combining data from other databases (Web of Sciences.....).

COMPETING INTERESTS

Author has declared that no competing interests exist.

REFERENCES

- M. Neville et J.J. Brooks, [Concrete technology]. Build Res Inf. 1991;19(4): 210-1.
DOI: 10.1080/09613219108727128.
- B. Piwakowski et P. Safinowski. Non-destructive non-contact air-coupled concrete evaluation by an ultrasound automated device. Civ Eng 30 June, 7th International Symposium Nondestruct. Test. Nantes Fr. NDTCE. 2009;9:603-8.
- Şimşek B, Uygunoğlu T, Korucu H, Kocakerim MM. Analysis of the effects of dioctyl terephthalate obtained from polyethylene terephthalate wastes on concrete mortar: A response surface methodology based desirability function approach application. J Clean Prod. janv 2018;170:437-45.
DOI: 10.1016/j.jclepro.2017.09.176
- Lotfi H, Faiz B, Mouddeh A, Menou A, Izbaim I, Maze G. et al. Ultrasonic characterization and hardening of mortar using the reflection technique. High Temp Mater Process. 2009;28(4):263-70, août.
DOI: 10.1515/HTMP.2009.28.4.263
- Bolborea B, Baera C, Dan S, Gruin A, Burduhos-Nergis DD, Vasile V. Concrete compressive strength by means of ultrasonic pulse velocity and moduli of elasticity. Materials (Basel). 2021;14(22).
DOI: 10.3390/ma14227018, PMID 34832417
- Shafabakhsh G, Hassani A. Evaluation of mechanical properties and durability of concrete pavement containing electric arc furnace slag and carbon nanostructures. A. Mohammadi Janaki. J Rehabil Civ Eng. févr 2023;11(1):1-20.
DOI: 10.22075/jrce.2021.23149.1499
- Mazloom M, Ramezani pour AA, Brooks JJ. Effect of silica fume on mechanical properties of high-strength concrete. Cem Concr Compos. mai 2004;26(4): 347-57.
DOI: 10.1016/S0958-9465(03)00017-9
- J. Newman, Choo BS. Advanced concrete technology set. Elsevier; 2003.
- Marsh BK, Day RL, Marsh K, Day RL. Cem Concr Res. 1988;18(2):301-10.
DOI: 10.1016/0008-8846(88)90014-2
- Akar C, Canbaz M. Effect of molasses as an admixture on concrete durability. J Clean Prod. janv 2016;112:2374-80.
DOI: 10.1016/j.jclepro.2015.09.081
- Dinakar P, Sahoo PK, Sriram G. Effect of metakaolin content on the properties of high strength concrete. Int J Concr Struct Mater. 2013;7(3):Art n° 3.
DOI: 10.1007/s40069-013-0045-0
- Okoye FN, Durgaprasad J, Singh NB. Effect of silica fume on the mechanical properties of fly ash based-geopolymer concrete. Ceram Int. févr 2016;42(2)(2):3000-6.
DOI: 10.1016/j.ceramint.2015.10.084
- Huang X, et S. Kaewunruen. 27 - Self-healing concrete. In: Samui P, Kim D, Iyer NR, Chaudhary S, Butterworth-Heinemann Éd, editors. New materials in civil engineering. 2020;13: 825-56.
DOI: 10.1016/B978-0-12-818961-0.00027-2
- Kurup A.R., Senthil Kumar K. Effect of recycled PVC fibers from electronic waste and silica powder on shear strength of concrete. J Hazard Toxic Radioact Waste. 2017;21(3).
DOI: 10.1061/(ASCE)HZ.2153-5515.0000354
- Senthil Kumar K., Baskar K. Development of ecofriendly concrete incorporating recycled high-impact polystyrene from hazardous electronic waste. J Hazard Toxic Radioact Waste. juil 2015;19(3): 04014042.
DOI: 10.1061/(ASCE)HZ.2153-5515.0000265

16. Singh N, Singh SP. Evaluating the performance of self compacting concretes made with recycled coarse and fine aggregates using non destructive testing techniques. *Constr Build Mater.* 2018; 181:73-84, août.
DOI: 10.1016/j.conbuildmat.2018.06.039
17. Singh N, Kumar P, Goyal P. Reviewing the behaviour of high volume fly ash based self compacting concrete. *J Build Eng.* nov 2019;26:100882.
DOI: 10.1016/j.jobe.2019.100882
18. Nunez I, Marani A, Flah M, Nehdi ML. Estimating compressive strength of modern concrete mixtures using computational intelligence: A systematic review. *Constr Build Mater.* déc 2021;310:125279.
DOI: 10.1016/j.conbuildmat.2021.125279.
19. Silvestro L., Jean Paul Gleize P. Effect of carbon nanotubes on compressive, flexural and tensile strengths of Portland cement-based materials: A systematic literature review. *Constr Build Mater.* 2020;264:120237.
DOI: 10.1016/j.conbuildmat.2020.120237
20. Ouyang X, Wu Z, Shan B, Chen Q, Shi C. A critical review on compressive behavior and empirical constitutive models of concrete. *Constr Build Mater.* Mar 2022; 323:126572.
DOI: 10.1016/j.conbuildmat.2022.126572
21. Amran M, Huang SS, Debbarma S, Rashid RSM. Fire resistance of geopolymers concrete: A critical review. *Constr Build Mater.* Mar 2022;324:126722.
DOI: 10.1016/j.conbuildmat.2022.126722
22. Yaghobian M, Whittleston G. A critical review of carbon nanomaterials applied in cementitious composites – a focus on mechanical properties and dispersion techniques. *Alex Eng J.* mai 2022;61(5):3417-33.
DOI: 10.1016/J.AEJ.2021.08.053
23. Solahuddin B.A. A critical review on experimental investigation and finite element analysis on structural performance of kenaf fibre reinforced concrete. *Structures.* 2022;35:1030-61.
DOI: 10.1016/J.ISTRUC.2021.11.056.
24. Yang H, Liu L, Yang W, Liu H, Ahmad W, Ahmad A, et al. A comprehensive overview of geopolymers composites: A bibliometric analysis and literature review. *Case Stud Constr Mater.* Jun 2022;16:e00830.
DOI: 10.1016/J.CSCM.2021.E00830
25. Rayhana R, Pant S, Genest M, Liu Z. Nonlinear ultrasonic testing and data analytics for damage characterization: A review. *H. Yun. Measurement.* 2021;186:110155.
DOI:10.1016/J.MEASUREMENT.2021.110155
26. Tashakkori A, Teddlie C. *SAGE handbook of mixed methods in social & behavioral research*, SAGE Handb. Mix. Methods Soc. Behav. Res; 2015.
doi: 10.4135/9781506335193.
27. van Eck NJ, Waltman L. Software survey: VO viewer, a computer program for bibliometric mapping. *Scientometrics.* 2010;84(2):523-38.
DOI: 10.1007/S11192-009-0146-3/FIGURES/7, PMID 20585380
28. Chao-Lung H, Anh-Tuan BL, Chun-Tsun C. Effect of rice husk ash on the strength and durability characteristics of concrete. *Constr Build Mater.* 2011;25(9):3768-72.
DOI: 10.1016/j.conbuildmat.2011.04.009
29. Prusty JK, Patro SK, Basarkar SS. Concrete using agro-waste as fine aggregate for sustainable built environment – A review. *Int J Sustain Built Environ.* déc 2016;5(2):312-33.
DOI: 10.1016/j.ijbsbe.2016.06.003
30. Singh M, Srivastava A, Bhunia D. An investigation on effect of partial replacement of cement by waste marble slurry. *Constr Build Mater.* 2017;134:471-88.
DOI:10.1016/J.CONBUILDMAT.2016.12.155
31. Güneş E., Gesoğlu M. Properties of self-compacting mortars with binary and ternary cementitious blends of fly ash and metakaolin. *Mater Struct.* 2008;41(9):1519-31.
DOI: 10.1617/s11527-007-9345-7.
32. Vegas I, Urreta J, Frías M, García R. Freeze–thaw resistance of blended cements containing calcined paper sludge. *Constr Build Mater.* 2009;23(8):2862-8, août.
DOI:10.1016/J.CONBUILDMAT.2009.02.034.
33. Skaropoulou A, Tsimilis S, Kakali G, Sharp JH, Swamy RN. Thaumasia form of sulfate attack in limestone cement mortars: A study on long term efficiency of mineral admixtures. *Constr Build Mater.* 2009; 23(6):2338-45.
DOI:10.1016/J.CONBUILDMAT.2008.11.004

34. Cheah CB, Samsudin MH, Ramli M, Part WK, Tan LE. The use of high calcium wood ash in the preparation of Ground Granulated Blast Furnace Slag and Pulverized Fly Ash geopolymers: A complete microstructural and mechanical characterization. *J Clean Prod.* 2017;156:114-23.
DOI: 10.1016/j.jclepro.2017.04.026
35. Kheder GF, Gabban AMA, Abid SM. Mathematical model for the prediction of cement compressive strength at the ages of 7 and 28 days within 24 hours. *Mater Struct.* 2003;36(10):693-701.
DOI: 10.1007/BF02479504
36. Skaropoulou A, Tsvilis S, Kakali G, Sharp JH, Swamy RN. Long term behavior of Portland limestone cement mortars exposed to magnesium sulfate attack. *Cem Concr Compos.* 2009;31(9):628-36.
DOI: 10.1016/J.CEMCONCOMP.2009.06.003
37. Chao-Lung H, Le Anh-Tuan BL, Chun-Tsun C. Effect of rice husk ash on the strength and durability characteristics of concrete. *Constr Build Mater.* 2011;25(9):3768-72.
DOI:10.1016/J.CONBUILDMAT.2011.04.009
38. Güneyisi E, Gesoğlu M, Özbay E. Effects of marble powder and slag on the properties of self compacting mortars. *Mater Struct.* 2009;42(6):813-26.
DOI: 10.1617/s11527-008-9426-2.
39. Cheah CB, Chung KY, Ramli M, Lim GK. The engineering properties and microstructure development of cement mortar containing high volume of intergrinded GGBS and PFA cured at ambient temperature. *Constr Build Mater.* Sep 2016;122:683-93.
DOI:10.1016/J.CONBUILDMAT.2016.06.105
40. Majdi HS, Shubbar AA, Nasr MS, Al-Khafaji ZS, Jafer H, Abdulredha M, et al. Experimental data on compressive strength and ultrasonic pulse velocity properties of sustainable mortar made with high content of GGBFS and CKD combinations. *Data Brief.* 2020;31:105961.
DOI: 10.1016/J.DIB.2020.105961, PMID 32671159
41. Bogas JA, Carriço A, Pereira MFC. Mechanical characterization of thermal activated low-carbon recycled cement mortars. *J Clean Prod.* 2019;218:377-89.
DOI: 10.1016/J.JCLEPRO.2019.01.325.
42. Topçu İB., Ateşin Ö. Effect of high dosage lignosulphonate and naphthalene sulphonate based plasticizer usage on micro concrete properties. *Constr Build Mater.* 2016;120:189-97.
DOI:10.1016/J.CONBUILDMAT.2016.05.112
43. Rumšys D, Bačinskas D, Spudulis E, Meškešas A. Comparison of material properties of lightweight concrete with recycled polyethylene and expanded clay aggregates. *Procedia Eng.* 2017;172:937-44.
DOI: 10.1016/J.PROENG.2017.02.105
44. Huseien G.F., Mirza J, Ariffin NF, Hussin MW. Synthesis and characterization of shelf-healing mortar with modified strength. *J Teknol. Sep* 2015;76(1):195-200.
DOI: 10.11113/JT.V76.3688.
45. Jeon IK, Qudoos A, Jakhrani SH, Kim HG, Ryou JS. Investigation of sulfuric acid attack upon cement mortars containing silicon carbide powder. *Powder Technol.* 2020;359:181-9.
DOI: 10.1016/J.POWTEC.2019.10.026
46. Lee T, Lee J. Setting time and compressive strength prediction model of concrete by nondestructive ultrasonic pulse velocity testing at early age. *Constr Build Mater.* 2020;252.
DOI:10.1016/J.CONBUILDMAT.2020.119027.
47. Nunes S., Costa C. Numerical optimization of self-compacting mortar mixture containing spent equilibrium catalyst from oil refinery. *J Clean Prod.* 2017;158:109-21, août.
DOI: 10.1016/J.JCLEPRO.2017.04.161
48. Mohammadhosseini H, Alrshoudi F, Md. Tahir M, Alyousef R, Alghamdi H, Alharbi YR et al. Performance evaluation of novel pre-packed aggregate concrete reinforced with waste polypropylene fibers at elevated temperatures. *Constr Build Mater.* 2020; 259(oct).
DOI:10.1016/J.CONBUILDMAT.2020.120418
49. García-Vera VE, Tenza-Abril AJ, Saval JM, Lanzón M. Influence of crystalline admixtures on the short-term behavior of mortars exposed to sulphuric acid. *Materials (Basel).* 2018;12(1).
DOI: 10.3390/MA12010082, PMID 30591624
50. Sasanipour H, Aslani F. Durability assessment of concrete containing surface

- pretreated coarse recycled concrete aggregates. *Constr Build Mater.* 2020;264. DOI:10.1016/J.CONBUILDMAT.2020.120203.
51. Kantarcı F, Türkmen İ, Ekinci E. Optimization of production parameters of geopolymer mortar and concrete: A comprehensive experimental study. *Constr Build Mater.* 2019;228. DOI:10.1016/J.CONBUILDMAT.2019.116770
 52. Kim H.G., Atta-ur-Rehman A, Qudoos A., Ryou J. Self-healing performance of GGBFS based cementitious mortar with granulated activators exposed to a seawater environment. *Constr Build Mater.* 2018;188:569-82. DOI:10.1016/J.CONBUILDMAT.2018.08.092
 53. Silva A, Soares A, Flores-Colen I, De Brito J. Mechanical characteristics of lightweight mortars on small-scale samples. *J Test Eval.* janv 2016;44(1):402-13. DOI: 10.1520/JTE20140535
 54. Güllü H, Ali Agha A. The rheological, fresh and strength effects of cold-bonded geopolymer made with metakaolin and slag for grouting. *Constr Build Mater.* 2021;274. DOI: 10.1016/J.CONBUILDMAT.2020.122091.
 55. Sherir MAA, Hossain KMA, Lachemi M. Fresh state, mechanical & durability properties of strain hardening cementitious composite produced with locally available aggregates and high volume of fly ash. *Constr Build Mater.* nov 2018;189:253-64. DOI:10.1016/J.CONBUILDMAT.2018.08.204
 56. Benosman A.S., Mouli M., Taibi H., Belbachir M., Senhadji Y., Bahlouli I. et al. Chemical, mechanical and thermal properties of mortar composites containing waste pet. *Environ Eng Manag J.* juil 2017;16(7):1489-505. DOI: 10.30638/EEMJ.2017.162
 57. Nogueira C.L., Rens K.L. Nogueira et K.L. Rens. *Constr Build Mater.* mai 2018;170:392-401. DOI:10.1016/J.CONBUILDMAT.2018.03.050.
 58. Khajehnouri Y, Chouteau M, Rivard P, Bérubé CL. Measuring electrical properties of mortar and concrete samples using the spectral induced polarization method: laboratory set-up. *Constr Build Mater.* 2019;210:1-12. DOI:10.1016/J.CONBUILDMAT.2019.03.160
 59. Borhan TM, Al Karawi RJ. Experimental investigations on polymer modified pervious concrete. *Case Stud Constr Mater.* 2020;12. DOI: 10.1016/J.CSCM.2020.E00335
 60. Green BH. Development of a high-density cementitious rock-matching grout using nano-particles. *Am Concr Inst ACI Spec Publ.* 2008(254) SP:121-32.
 61. Şahin F, Uysal M, Canpolat O, Aygörmüş Y, Cosgun T, Dehghanpour H. Effect of basalt fiber on metakaolin-based geopolymer mortars containing rille, basalt and recycled waste concrete aggregates. *Constr Build Mater.* 2021;301. DOI: 10.1016/J.CONBUILDMAT.2021.124113
 62. Akyuncu V., Sanliturk F. Investigation of physical and mechanical properties of mortars produced by polymer coated perlite aggregate. *J Build Eng.* 2021; 38. DOI: 10.1016/J.JOBE.2021.102182
 63. Polat R., Demirboğa R, Karagöl F. The influence of expanded perlite aggregate on compressive strength, linear autogenous shrinkage, restrained shrinkage, heat of hydration of cement-based materials. *Struct Concr.* 2018;19(6):1771-81. DOI: 10.1002/SUCO.201700259
 64. Lizarazo-Marriaga J, García F, Higuera C. Preliminary electrochemical cementation of high volume fly ash mortars. *Constr Build Mater.* Sep 2016;122:54-62. DOI:10.1016/J.CONBUILDMAT.2016.06.070
 65. Ariffin NF, Hussin MW, Mohd Sam AR, Seung Lee H, A Khalid NH, Abdul Shukur Lim NH. et al. Mechanical properties and self-healing mechanism of epoxy mortar. *J Teknol.* 2015;77(12):37-44. DOI: 10.11113/JT.V77.6306
 66. Uygunoğlu T. Uygunoğlu. *Adv Cem Res.* 2011;23(3):113-22. DOI: 10.1680/adcr.9.00053
 67. Nayel IH. Nasr MS, Abdulridha SQ. Présenté à IOP conference series impact of elevated temperature on the mechanical properties of cement mortar reinforced with rope waste fibres. *IOP Conf Ser. Mater Sci Eng.* 2020;671(1). DOI: 10.1088/1757-899X/671/1/012080
 68. Othuman Mydin MA, Mohd Zamzani N. Coconut fiber strengthen high performance concrete: Young's modulus, ultrasonic

- pulse velocity and ductility properties. *Int J Eng Technol.* 2018;7(2):284-7.
DOI: 10.14419/ijet.v7i2.23.11933
69. Mohd Sam AR, Ariffin NF, Hussin MW, Seung Lee H, Ismail AM, Abdul Shukor Lim NH, et al. Performance of epoxy resin as self-healing agent. *J Teknol.* 2015; 77(16):9-13.
DOI: 10.11113/JT.V77.6386
70. Huseien GF, Sam ARM, Faridmehr I, Baghban MH. Performance of epoxy resin polymer as self-healing cementitious materials agent in mortar. *Materials (Basel).* 2021;14(5):1-23.
DOI: 10.3390/MA14051255, PMID 33800835
71. Hilal N, Saleh RD, Yakoob NB, Banyhussan QS. Utilization of ceramic waste powder in cement mortar exposed to elevated temperature. *Innov Infrastruct Solut.* 2021;6(1).
DOI: 10.1007/S41062-020-00403-X
72. Yap SP, Goh Y, Goh WX, Mo KH, Liu MYJ, Ibrahim HA. Relationship between microstructure and performance of polypropylene fibre reinforced cement composites subjected to elevated temperature. *Eur J Environ Civ Eng.* avr 2022;26(5):1792-806.
DOI: 10.1080/19648189.2020.1734489
73. Chatterjee A, Chattopadhyay B, Mandal S. 'Bacterium amended 100% fly ash geopolymer', présenté à AIP Conference. *Proceedings.* 2019;2158.
DOI: 10.1063/1.5127137
74. Patel GK, Deo SV, Patel K, Deo SV. *Indian J Sci Technol.* 2016;9(37).
DOI: 10.17485/ijst/2016/v9i37/93541
75. Sahin F, Uysal M, Canpolat O, Cosgun T, Dehghanpour H. The effect of polyvinyl fibers on metakaolin-based geopolymer mortars with different aggregate filling. *Constr Build Mater.* 2021;300.
DOI: 10.1016/j.conbuildmat.2021.124257
76. Thao AT, Magee B, Woodward D. A preliminary characterisation of innovative semi-flexible composite pavement comprising geopolymer grout and reclaimed asphalt planings. *Materials (Basel).* 2020;13(16).
DOI: 10.3390/MA13163644, PMID 32824557
77. Sadowski Ł, Krzywiński K., Michoń M. The influence of texturing of the surface of concrete substrate on its adhesion to cement mortar overlay. *J Adhes.* 2020;96 (1-4):130-43.
DOI: 10.1080/00218464.2019.1654383
78. Y, Wong S, Kwan WH, Lee FK, Sin JC, Wai SH. Performance of acid leached rice husk ash (ARHA) in Mortar. *Int J Integr Eng.* 11, n° 9 Special . 2019;285-94.
79. Sharan S, Raijiwala DB. Investigations on the properties of coconut shell charcoal concrete, *Int. J. Civ. Eng Technol.* 2017;8(4):1376-83.
80. De Silva SDC, Sivahar V. Présenté à 2nd International Moratuwa Eng Res Conference, *MER Con.* 2016; 80: 337-42.
DOI: 10.1109/MERCon.2016.7480164
81. Güllü H, Ali Agha A. The rheological, fresh and strength effects of cold-bonded geopolymer made with metakaolin and slag for grouting. *Constr Build Mater.* 2021;274.
DOI: 10.1016/j.conbuildmat.2020.122091
82. Green BH. 82(B). Development of a High-Density, High-Strength, Cementitious Grout Using Colloidal Silica Nano-Particles. Présenté à Geotechnical Special Publication. 2012(228) GSP:1850-8.
DOI: 10.1061/9780784412350.0160.
83. Nalon GH, Alves MA, Pedroti LG, Lopes Ribeiro JC, Hilarino Fernandes WE, Silva de Oliveira DS. Compressive strength, dynamic, and static modulus of cement-lime laying mortars obtained from samples of various geometries. *J Build Eng.* 2021;44.
DOI: 10.1016/j.jobe.2021.102626.
84. Tomczak K, Jakubowski J, Kotwica Ł. Key factors determining the self-healing ability of cement-based composites with mineral additives. *Materials (Basel).* 2021;14(15).
DOI: 10.3390/ma14154211, PMID 34361409
85. Siddique S, Kim H, Son H, Jang JG. Characteristics of preplaced aggregate concrete fabricated with alkali-activated slag/fly ash cements. *Materials (Basel).* 2021;14(3):1-17.
DOI: 10.3390/ma14030591, PMID 33513951
86. Ekaputri J, Alrizal FF, Husein I. Triwulan MM, Abdullah AB. An application of rice husk ash (RHA) and calcium carbonate (CaCO₃) as material for self-healing cement. *Key Eng Mater.* 2016;673:3-12.
DOI: 10.4028/www.scientific.net/KEM.673.3
87. Kaya M, Yıldırım ZB, Köksal F, Beycioğlu A, Kasprzyk I. Evaluation and multi-objective optimization of lightweight

- mortars parameters at elevated temperature via box–Behnken optimization approach. *Materials (Basel)*. 2021;14(23). DOI: 10.3390/ma14237405, PMID 34885562
88. Adak D, Marbaniang DF, Dutta S. Experimental studies on the development of a self-healing cementitious matrix for repair and retrofitting of concrete structures. *Int J Struct Integr*. 2021;12(5): 799-814. DOI: 10.1108/IJSI-07-2021-0082
 89. Huang J-M, Yang W-D, Wang H-Y, Kao T-C. Engineering properties of colorful mortar with inorganic color paste. *Appl Sci Switz*. 2021;11(14). DOI: 10.3390/app11146297
 90. Khan MH, Sikandar MA, Jamal Q. Properties of mortars formulated from self-compacting high-performance concrete containing various mineral additions. *Iran J Sci Technol Trans Civ Eng*. 2021; 45(2):779-93. DOI: 10.1007/s40996-020-00483-w
 91. Boukhelkhal A. Assessment of the Behavior under conventional and high temperatures of eco-friendly self-compacting mortar containing glass and ceramic powders. *Arab J Sci Eng. avr* 2022;47(4):4821-31. DOI: 10.1007/s13369-020-05306-8
 92. Zhou BY, Zhang M, Ma GW. Effect of all-component recycled gfrp on physical-mechanical properties and microstructures of concrete. *Mater Sci Forum*. 2021; 1036:402-18. DOI: 10.4028/www.scientific.net/MSF.1036.402
 93. Falah MW, Hafedh AA, Hussein SA, Al-Khafaji ZS, Shubbar AA, Nasr MS. The combined effect of CKD and Silica fume on the mechanical and durability performance of cement mortar. *Key Eng Mater*. 2021;895:59-67. DOI:10.4028/www.scientific.net/KEM.895.59
 94. Tezer MM, Başaran Bundur Z. Çimento- esaslı harçlarda kendiliğinden iyileşmenin sağlanması için 2 bileşenli biyolojik katkı maddesinin geliştirilmesi. *J Fac Eng Archit Gazi Univ*. 2021;36(3):1171-84. DOI: 10.17341/gazimmfd.695637
 95. Gao F et al. Improvement effect of a phase change material on microstructure of cement-based materials at elevated temperatures. *Struct Concr*. 2021;95. DOI: 10.1002/suco.202100023
 96. Huynh TP, Nguyen DT, Phan TD, Ho NT, Bui PT, Nguyen MH. Evaluation of mechanical strength and durability characteristics of eco-friendly mortar with cementitious additives. *J Appl Sci Eng Taiwan*. 2021;24(4):541-52. DOI: 10.6180/jase.202108_24(4).0010
 97. Johari IB, Md Said MAM, Snin MABMohd, Ayob NFAB, Jamaluddin NSB, Rashid MRBM. Effect of treated sago pith waste ash and silica fume to the mechanical properties of fly ash-based geopolymer brick. *Key Eng Mater*. 2021;879:100-14. DOI: 10.4028/www.scientific.net/KEM.879.100
 98. Babu S, Sahad M, Vijeesh KP, Syamjith CK, Raneesh M, Ramaswamy KP, et al. Mechanical properties of blended cement mortar systems exposed to ammonium chloride environment', présenté à IOP Conference Series. *IOP Conf Ser.: Mater Sci Eng*. 2020;989(1). DOI: 10.1088/1757-899X/989/1/012016
 99. Mohammed A.A. Compressive Strength-Ultrasonic Pulse Velocity Relationship of Concrete Containing Plastic Waste. *IOP Conf Ser Mater Sci Eng. nov* 2020; 978(1):012010. DOI: 10.1088/1757-899X/978/1/012010
 100. Nesvetaev G, Dolgova A, Revyakin A. 'About frost resistance of the contact zone of dry adhesive mixes classes C1 and C2', présenté à E3S Web of Conferences. *E3S Web Conf*. 2020;157. DOI: 10.1051/e3sconf/202015706027
 101. Radvand T., Toufigh V. Properties of concrete containing Guar gum. *Eur J Environ Civ Eng. mai* 2022;26(7):2736-52. DOI: 10.1080/19648189.2020.1767217
 102. Chakraborty UB, Bajaj S, Dhanote S. Experimental investigation to study the properties of concrete incorporated with GGBS and GBS. *Lect. Notes Civ. Eng*. 2020;35:261-70. DOI: 10.1007/978-981-13-7480-7_24
 103. J, Qudoos A, Rehman AU, Kim HG, Jakhriani SH, Ryou J-S. Self-healing performance of coated slag aggregates in wheat straw ash blended cement composites. *S. Lee. J Ceram Process Res*. 2019;20(4):314-20.
 104. Mohd Sam AR, Ariffin NF, Hussin MW, Seung Lee HA, Ismail M, Abdul Shukor Lim NH, et al. Performance of epoxy resin as self-healing agent. *J Teknol*. 2015; 77(16):9-13. DOI: 10.11113/jt.v77.6386

105. Aygörmez Y, Canpolat O, Al-Mashhadani MM, Uysal M, Şahin F. 'Sulfate resistance of sustainable geopolymer mortars. Présenté à Sustainable Construction Materials and Technologies. 2019;2.
106. Jawahar SC, Palanivel Raja S, Franco PA, Paul J, Smiline Shiny D. Effect of corrosion on durability of mineral free dredged marine sand containing mortar with various additives. *J Balk Tribol Assoc.* 2016;22,n^o 4-I:3919-35.
107. Mukherjee S. Mondal. Self-healing properties of conventional and fly ash cementitious mortar, exposed to high temperature ». *Emerg Des Solut Struct Health Monit Syst.* 2015:1-11.
DOI: 10.4018/978-1-4666-8490-4.ch001
108. Abas NF, Karim MA, Abas NF, Karim MA. *J Teknol.* 2015;75(5):13-8.
DOI: 10.11113/jt.v75.4954
109. Hoseini M, Bindiganavile V. Application of ultrasonic pulse velocity in predicting the permeability of concrete in service. Présenté à American Concrete Institute [ACI Special Publication](280). SP. 2011; 1-23.

Appendix A. List of papers selected in the this analysis review

No.	Document	Country/region	Research theme
1	Chao-Lung H. [37]	Taiwan	Effect of rice husk ash on the strength and durability characteristics of concrete
2	Prustyj.K. [29]	India	Concrete using agro-waste as fine aggregate for sustainable built environment – A review
3	Singh M. [30]	India	An investigation on effect of partial replacement of cement by waste marble slurry
4	Güneyisi E.[31]	Turkey	Properties of self-compacting mortars with binary and ternary cementitious blends of fly ash and metakaolin
5	Vegas I. [32]	Spain	Freeze-thaw resistance of blended cements containing calcined paper sludge
6	Skaropoulou A.[33]	Greece	Thaumasite form of sulfate attack in limestone cement mortars: A study on long term efficiency of mineral admixtures
7	Cheahc.B. [34]	Malaysia	The use of high calcium wood ash in the preparation of Ground Granulated Blast Furnace Slag and Pulverized Fly Ash geopolymers: A complete microstructural and mechanical characterization
8	Khederg.F.[35]	Iraq	Mathematical model for the prediction of cement compressive strength at the ages of 7 and 28 days within 24 hours
9	Skaropoulou A.[36]	Greece	Long term behavior of Portland limestone cement mortars exposed to magnesium sulfate attack
10	Güneyisi E. [38]	Turkey	Effects of marble powder and slag on the properties of self compacting mortars
11	Cheah C.B.[39]	Malaysia	The engineering properties and microstructure development of cement mortar containing high volume of inter-grinded GGBS and PFA cured at ambient temperature
12	Majdih.S. [40]	Iraq	Experimental data on compressive strength and ultrasonic pulse velocity properties of sustainable mortar made with high content of GGBFS and CKD combinations
13	Bogasj.A. [41]	Portugal	Mechanical characterization of thermal activated low-carbon recycled cement mortars
14	Topçui.B. [42]	Turkey	Effect of high dosage lignosulphonate and naphthalene sulphonate based plasticizer usage on micro concrete properties
15	Rumšys D. [43]	Lithuania	Comparison of Material Properties of Lightweight Concrete with Recycled Polyethylene and Expanded Clay Aggregates
16	Huseieng.F. [44]	Malaysia	Synthesis and characterization of shelf-healing mortar with modified strength
17	Jeoni.K. [45]	South Korea	Investigation of sulfuric acid attack upon cement mortars containing silicon carbide powder
18	Lee T. [46]	South Korea	Setting time and compressive strength prediction model of concrete by nondestructive ultrasonic pulse velocity testing at early age
19	Nunes S. [47]	Portugal	Numerical optimization of self-compacting mortar mixture containing spent equilibrium catalyst from oil refinery
20	Mohammadhosseini H. [48]	Malaysia	Performance evaluation of novel prepacked aggregate concrete reinforced with waste polypropylene fibers at elevated temperatures
21	García-Verav.E. [49]	Spain	Influence of crystalline admixtures on the short-term behaviour of mortars exposed to sulphuric acid

No.	Document	Country/region	Research theme
22	Sasanipour H. [50]	Iran	Durability assessment of concrete containing surface pretreated coarse recycled concrete aggregates
23	Kantarci F.[51]	Turkey	Optimization of production parameters of geopolymer mortar and concrete: A comprehensive experimental study
24	Kimh.G. [52]	South Korea	Self-healing performance of GGBFS based cementitious mortar with granulated activators exposed to a seawater environment
25	Silva A. [53]	Portugal	Mechanical characteristics of lightweight mortars on small-scale samples
26	Güllü H. [54]	Turkey	The rheological, fresh and strength effects of cold-bonded geopolymer made with metakaolin and slag for grouting
27	Sherirm. A.A. [55]	Canada	Fresh state, mechanical & durability properties of strain hardening cementitious composite produced with locally available aggregates and high volume of fly ash
28	Benosmana.S. [56]	Algeria	Chemical, mechanical and thermal properties of mortar composites containing waste pet
29	Nogueirac.L. [57]	United States	Experimental analysis of cement-based materials under shear stress
30	Khajehnouri Y. [58]	Canada	Measuring electrical properties of mortar and concrete samples using the spectral induced polarization method: laboratory set-up
31	Borhant.M. [59]	Iraq	Experimental investigations on polymermodifiedperviousconcrete
32	Green B.H. [60]	United States	Development of a high-density cementitious rock-matching grout using nano-particles
33	Şahin F. [61]	Turkey	Effect of basalt fiber on metakaolin-based geopolymer mortars containing rilem, basalt and recycled waste concrete aggregates
34	Akyuncu V. [62]	Turkey	Investigation of physical and mechanical properties of mortars produced by polymer coated perlite aggregate
35	Polat R. [63]	Turkey	The influence of expanded perlite aggregate on compressive strength, linear autogenous shrinkage, restrained shrinkage, heat of hydration of cement-based materials
36	Lizarazo-Marriaga J. [64]	Colombia	Preliminary electrochemical cementation of high volume fly ash mortars
37	Ariffinn.F. [65]	Malaysia	Mechanical properties and self-healing mechanism of epoxy mortar
38	Uygunoğlu T. [66]	Turkey	Reuse of hydrated mortar as partial replacement material in cement
39	Nayel I.H. [67]	Iraq	Impact of elevated temperature on the mechanical properties of cement mortar reinforced with rope waste fibres
40	Othuman Mydin M.A. [68]	Malaysia	Coconut fiber strengthen high performance concrete: Young's modulus, ultrasonic pulse velocity and ductility properties
41	Mohdsama.R.M. [69]	Malaysia	Performance of epoxy resin as self-healing agent
42	Huseieng.F. [70]	Malaysia	Performance of epoxy resin polymer as self-healing cementitious materials agent in mortar
43	Hilal N. [71]	Iraq	Utilization of ceramic waste powder in cement mortar exposed to elevated temperature
44	Yap s.p. [72]	Malaysia	Relationship between microstructure and performance of polypropylene fibre reinforced cement composites subjected to elevated temperature

No.	Document	Country/region	Research theme
45	Chatterjee a. [73]	India	Bacterium amended 100% fly ash geopolymer
46	Patel g.k. [74]	India	Effect of natural organic materials as admixture on properties of concrete
47	Sahin f. [75]	Turkey	The effect of polyvinyl fibers on metakaolin-based geopolymer mortars with different aggregate filling
48	Thao a. [76]	United Kingdom	A preliminary characterisation of innovative semi-flexible composite pavement comprising geopolymer grout and reclaimed asphalt planings
49	Sadowski ł. [77]	Poland	The influence of texturing of the surface of concrete substrate on its adhesion to cement mortar overlay
50	Wong y.s. [78]	Malaysia	Performance of acid leached rice husk ash (ARHA) in Mortar
51	Sharan s. [79]	India	Investigations on the properties of coconut shell charcoal concrete
52	De silva s.d.c. [80]	Sri Lanka	Non-destructive evaluation of strength gain of ordinary portland cement mortar by ultrasonic pulse velocity method
53	Güllü, H. (2021)[81]	Turkey	The rheological, fresh and strength effects of cold-bonded geopolymer made with metakaolin and slag for grouting
54	Green b.h. [82]	United States	Development of a high-density, high-strength, cementitious grout using colloidal silica nano- particles
55	Nalon g.h. [83]	Brazil	Compressive strength, dynamic, and static modulus of cement-lime laying mortars obtained from samples of various geometries
56	Tomczak k. [84]	Poland	Key factors determining the self-healing ability of cement-based composites with mineral additives
57	Kocáb d. (2021)	Czech Republic	Ratio between dynamic Young's moduli of cementitious materials determined through different methods
58	Siddique s. [85]	South Korea	Characteristics of preplaced aggregate concrete fabricated with alkali-activated slag/fly ash cements
59	Ekaputri j.j. [86]	Indonesia	An application of Rice husk ash (RHA) and calcium carbonate (CaCO ₃) as material for self-healing cement
60	Kaya m. [87]	Turkey	Evaluation and multi-objective optimization of lightweight mortars parameters at elevated temperature via box–Behnken optimization approach
61	Adak d. [88]	India	Experimental studies on the development of a self-healing cementitious matrix for repair and retrofitting of concrete structures
62	Huang j.-m. [89]	Taiwan	Engineering properties of colorful mortar with inorganic color paste
63	Khan m.h. [90]	Pakistan	Properties of Mortars Formulated from Self-Compacting High-Performance Concrete Containing Various Mineral Additions
64	Boukhelkhal a. [91]	Algeria	Assessment of the Behavior Under Conventional and High Temperatures of Eco-friendly Self-Compacting Mortar Containing Glass and Ceramic Powders
65	Zhou b.[92]	China	Effect of all-component recycled grp on physical-mechanical properties and microstructures of concrete
66	Falah m.w. [93]	Iraq	The combined effect of CKD and silica fume on the mechanical and durability performance of cement mortar

No.	Document	Country/region	Research theme
67	Tezer m.m.[94]	Turkey	Development of a 2-phase bio-additive for self-healing cement-based materials
68	Gao f. [95]	China	Improvement effect of a phase change material on microstructure of cement-based materials at elevated temperatures
69	Huynh t.-p.[96]	Viet Nam	Evaluation of mechanical strength and durability characteristics of eco-friendly mortar with cementitious additives
70	Johari i.b.[97]	Malaysia	Effect of treated sago pith waste ash and silica fume to the mechanical properties of fly ash-based geopolymer brick
71	Babu s.[98]	India	Mechanical properties of blended cement mortar systems exposed to ammonium chloride environment
72	Azad A. M.[99]	Iraq	Compressive Strength-Ultrasonic Pulse Velocity Relationship of Concrete Containing Plastic Waste
73	Nesvetaev g.[100]	Russian Federation	About frost resistance of the contact zone of dry adhesive mixes classes C1 and C2
74	Radvand t. [101]	United States	Properties of concrete containing Guar gum
75	Chakraborty u.b. [102]	India	Experimental investigation to study the properties of concrete incorporated with GGBS and GBS
76	Lee j.s. [103]	South Korea	Self-healing performance of coated slag aggregates in wheat straw ash blended cement composites
77	Mohd.sam a.r.[104]	Malaysia	Performance of epoxy resin as self-healing agent
78	Aygörmez y.[105]	Turkey	Sulfate resistance of sustainable geopolymer mortars
79	Carmel jawahar s.[106]	India	Effect of corrosion on durability of mineral free dredged marine sand containing mortar with various additives
80	Mukherjee s.[107]	India	Self-healing properties of conventional and fly ash cementitious mortar, exposed to high temperature
81	Abas n.f.[108]	Malaysia	Properties of mortar blocks with waste concrete ash (WCA) as a cement replacement
82	Hoseini m.[109]	Canada	Application of ultrasonic pulse velocity in predicting the permeability of concrete in service

© 2023 Lotfi; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
 The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/96427>